

The Sashco Snorkler,  
made exclusively for  
Log Jam™ Chinking &  
Log Builder™ Log Sealant



## 90 Day Limited Warranty

All Snorkler parts (excluding the stator) are warranted against defects for a 90 day period. Parts are warranted under usage described in the instruction manual and are limited to parts replacement.

NOTE: do not use Perma-Chink® or Weatherall® chinking in the Sashco Snorkler. They are too thick and will burn out the Snorkler's pump.

Perma-Chink is a registered trademark of the Perma-Chink Systems, Inc. Weatherall is a registered trademark of Weatherall, Inc.

Distributed by:

Caulk and  
**Chink**  
your log home

**Fast**  
and  
**Easy**  
with the



10330 E. 107th Place • Brighton, CO 80601  
1-800-767-5656 • Fax: (303) 286-0400  
www.sashco.com

SNK 003  
8/99

SASHCO SNORKLER

## What is a Sashco Snorkler?




The Sashco Snorkler™ is a variable speed pump that greatly reduces the time spent caulking

and chinking log homes. The self-priming pump applies caulk or chink directly from a straight-sided 5-gallon bucket. The Snorkler applies a smooth and consistently even bead, creating less need for tooling. Different size nozzles are also available for almost any application.

The Snorkler is made exclusively for Log Jam™ Chinking and Log Builder™ Log Sealant packed in straight-sided 5-gallon buckets.

## Features of the Snorkler

The Snorkler has an easy to use electric motor which operates on standard 115 voltage, so no air compressor is needed. If there should happen to be a malfunction in the field, indicator lights will illuminate to identify the problem. A cutoff switch stops the pump when the pail is empty and large rubber tires on a sturdy cart allow for maneuverability.

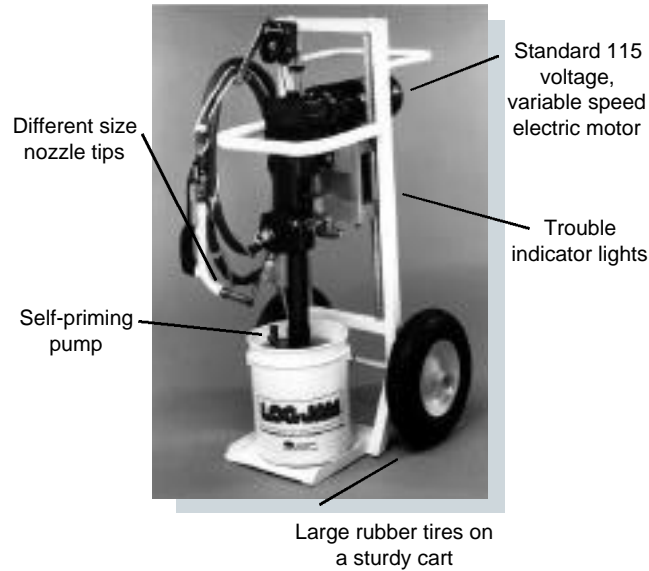

## Snorkler Includes

- 1 complete Snorkler Pump with all motor and cart parts
- 1 instruction manual
- 3 Snorkler tips (sizes: 3/4", 1", 1 1/4")
- 25 foot hose

## Expected Production Rates

| Joint Size | Speed      |
|------------|------------|
| 1" x 1/4"  | 123 ft/min |
| 2" x 1/4"  | 31 ft/min  |
| 3" x 1/4"  | 20 ft/min  |
| 4" x 1/4"  | 15 ft/min  |

## Snorkler Specifications

|                     |  |
|---------------------|--|
| Height:             | 51"  |
| Width:              | 25 3/4"  |
| Depth:              | 29"  |
| Weight:             | 285 lbs.   |
| Shipping Weight:    | 325 lbs.   |
| Power:              | 115 Volts AC   |
| Used With:          | 5-gallon, straight-sided buckets only  |
| Hose Length:        | 25 feet (standard equipment)   |
| Tip Sizes:          | 1/4", 1", 1 1/4" (standard equipment)  |
| Stator:             | Rubber pump sleeve size 2L3, Buna-N Rubber; this part is the most subject to wear and will need to be replaced periodically.   |
| Expected Flow Rate: | .8 gallons per minute at high speed with 1 1/4" tip (Log Jam @ 70°F). Flow rate is affected by length of hose, temperature, viscosity of material being pumped, size of tip used and the amount of wear (over time) on the stator. |

## How do I get a Snorkler?

The Sashco Snorkler Pump may be purchased directly from Sashco (call for more information) or it may be rented from one of our distributors.

Call us for the name of a distributor near you.  
1-800-767-5656 or visit us at our web site at [www.sashco.com](http://www.sashco.com).